




CRY3406-S01

1/4" pressure-field, Prepolarized, Low-noise Microphone Set



Features

Features

Sensitivity	15.8 mV/Pa
Dynamic Range	26 dBA to 146 dB
Frequency Range	4Hz to 20 kHz ±2 dB

Applications

Anechoic chamber test
Speaker test
Audiometer test.

Standards

IEC 61094 4:1995 Measurement microphones - Part 4

Components

CRY3406 1/4" Pressure-field Prepolarised Microphone
CRY3541 1/4" IEPE Preamplifier

Introduction

The CRY3406-S01 is a 1/4" pressure field pre polarization measurement microphone and preamplifier designed for sensitive acoustic testing in low noise environments. Its unique design allows it to have very low self-noise and to withstand sound pressure levels up to 146 dB, making it an excellent general-purpose measurement microphone for high-definition audio measurements.

Check out our Microphone Selection Guide

acsoft.co.uk/microphone-selection-tool

Highlights

Use of High-level Pressure-field Microphones

Low-noise microphones have very low internal noise. When performing acoustic measurements, they have lower background noise to obtain lower acoustic signals.

Pressure-field microphone sets are specifically designed for measurements in small enclosed cavities or near the sound source ports, and are widely used in fields such as acoustic research and electroacoustic testing.

Compatibility

The CRY SOUND prepolarized microphone kit requires a constant current source power module (IEPE power supply) that can provide a current of 2 mA to 20 mA and a no-load voltage of 24V.

IEPE is a universal constant current source power supply technology used on sensors. Each manufacturer has different names, such as ICP, CCP, etc.

TEDS Microphone Set

Supports TEDS, and TEDS programmed to the IEEE 1451.4 standard for SMART transducers, V 1.0 format.

Calibration

Each CRY SOUND microphone set is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year.

Quality & Warranty

All CRY SOUND microphone capsules use 3rd generation titanium diaphragms and protection grids and synthetic sapphire insulators - resulting in the most rugged and reliable measurement microphones on the market. Titanium provides superior corrosion resistance, high temperature stability, impact resistance and strength-to-mass than traditional nickel and stainless steel. All capsules are assembled in strict clean-room environments for maximum quality.

CRY SOUND microphones and preamplifiers are supported by a 10-year warranty—offering one of the best service guarantees in the world.

Technical Specifications

Specifications

Field Type	Pressure-field
Sensitivity (± 3 dB)	15.8 mV/Pa, -38 dB re 1V/Pa
Frequency Response	4 Hz to 20kHz ± 2 dB
Polarization Voltage	0 V
Dynamic Range (re.20uPa)	26 dBA to 146 dB
Operating Temperature	20°C to +60°C (-4°F to +140°F)
Temperature Stability	0.01 dB/°C (-10°C to +50°C) 0.006 dB/°F (+14°F to +122°F)
Static Pressure Stability	-0.01 dB/kPa
Operating Humidity Range	0 to 90%RH no condensation
Humidity Stability	< 0.1 dB (0 to 90%RH no condensation)
Pressure Equalization Vent	Side vented
IEC 61094-4 Type	WS3P
Output Impedance	<50 Ω
Maximum Output Voltage	>10.0 Vp
DC Bias Voltage	IEPE (2 mA to 20 mA)
Current Source	12V ± 2 V
Typical Operating Current	4 mA
Interface Type	SMB

Frequency Response

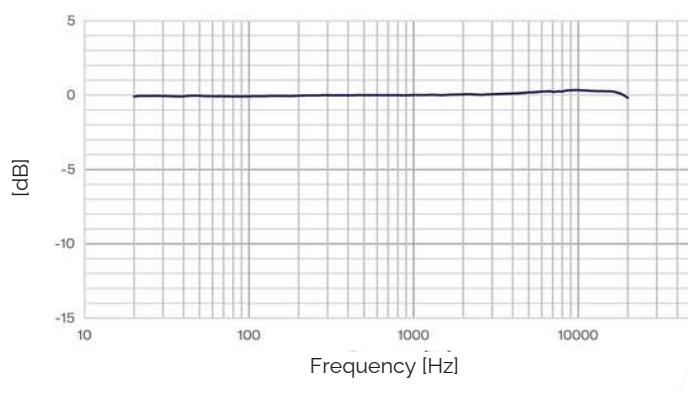


Fig.1 CRY3406-S01 Microphone Set Typical Frequency Response

Dimensions

Height with Grid	56.2 mm (2.213")
Diameter with Grid	7 mm (0.276")

Drawings (mm) [inch]

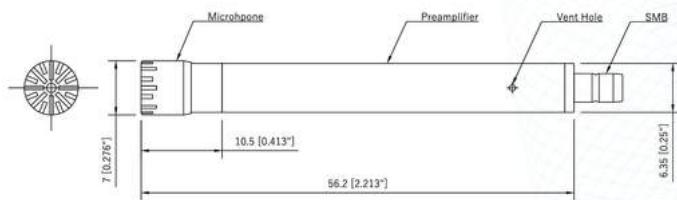


Fig.2 CRY3406-S01 Microphone Set Drawings

Ordering information

Consisting of

Measurement Microphone	CRY3406 1/4" Pressure-field Prepolarized Microphone
Preamplifier	CRY3541 1/4" IEPE Preamplifier
Cable	SMB to BNC Cable /1.5m

Optional Accessories

Microphone Clamp	1/4" Microphone Clamp
Power Supply	CRY575 Three-channel Microphone Power Supply
Cable	SMB to BNC Cable /0.6m SMB to BNC Cable /0.8m SMB to BNC Cable /2.0m

Related Products

CRY3102-S01	1" pressure-field prepolarized low-noise microphone set, 50 mV/Pa, 4 Hz-8 kHz, 12 dBA-136dB
CRY3202-S01	1/2" pressure-field prepolarized wide frequency microphone set, 12.5 mV/Pa, 3.15 Hz-20kHz, 23 dBA-148dB
CRY3402-S01	1/4" pressure-field prepolarized ultra-high frequency microphone set, 1.6 mV/Pa, 4 Hz-70kHz, 45dB-166 dB
CRY3404-S01	1/4" pressure-field prepolarized high-level microphone set, 0.56 mV/Pa, 10 Hz-20kHz, 53dB-175dB
CRY3261-S01	1/2" free-field prepolarized ultra low-noise microphone set, 354 mV/Pa, 3.15 Hz-20kHz, 7.5dBA-115dB