



CRY3101-S01

1" Free-Field Prepolarized Low- noise Microphone Set



Features

● Features

Sensitivity	50 mV/Pa
Dynamic Range	12 dBA to 135 dB
Frequency Range	4 Hz to 16 kHz ± 2 dB

● Applications

Anechoic chamber measurements
Speaker test
Low-noise test

● Standards

IEC 61094 4:1995 Measurement microphones - Part 4

● Components

CRY3101 1" Free-field Prepolarized Microphone
CRY3501 1/2" IEPE Preamplifier

Introduction

The CRY3101-S01 is a free-field Pre-polarised microphone and preamplifier set specifically designed for sensitive acoustic testing in low-noise environments, such as anechoic chambers and quiet rooms.

It is also widely applicable in various fields that require precise acoustic testing, research in acoustical design, and calibration testing of audio equipment including speakers.

Check out our Microphone Selection Guide

acsoft.co.uk/microphone-selection-tool

Highlights

● Use of High-level Free-field Microphones

Low-noise microphones have very low internal noise. When performing acoustic measurements, they have lower background noise to obtain lower acoustic signals. Free-field microphone sets are specifically designed for measurements in environments that are free from reflections or echoes and are widely used in fields such as acoustic research, noise monitoring, and sound system testing

● Compatibility

The CRY SOUND Pre-polarised microphone kit requires a constant current source power module (IEPE power supply) that can provide a current of 2mA to 20mA and a no-load voltage of 24V.

IEPE is a universal constant current source power supply technology used on sensors. Each manufacturer has different names, such as ICP, CCP, etc.

● TEDS Microphone Set

Supports TEDS, and TEDS programmed to the IEEE 1451.4 standard for SMART transducers, V 1.0 format.

● Calibration

Each CRY SOUND microphone set is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year

● Quality & Warranty

All CRY SOUND microphone capsules use 3rd generation titanium diaphragms and protection grids and synthetic sapphire insulators - resulting in the most rugged and reliable measurement microphones on the market. Titanium provides superior corrosion resistance, high temperature stability, impact resistance and strength-to-mass than traditional nickel and stainless steel. All capsules are assembled in strict clean-room environments for maximum quality.

CRY SOUND microphones and preamplifiers are supported by a 10-year warranty—offering one of the best service guarantees in the world.

Technical Specifications

Specifications

Field Type	Free-field
Sensitivity (± 3 dB)	50 mV/Pa, -26 dB re 1V/Pa
Frequency Response	4 Hz to 16 kHz ± 2 dB
Polarization Voltage	0 V
Dynamic Range (re.20uPa)	12 dBA to 135 dB
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Temperature Stability	0.015 dB/°C (-10°C to +50°C) 0.008 dB/°F (+14°F to +122°F)
Static Pressure Stability	-0.01 dB/kPa
Operating Humidity Range	0 to 90%RH no condensation
Humidity Stability	< 0.1 dB (0 to 90%RH no condensation)
Pressure Equalization Vent	Rear vented
IEC 61094-4 Type	WS1F
Output Impedance	< 35 Ω
Maximum Output Voltage	> 9 Vp
DC Bias Voltage	12V \pm 2 V
Current Source	IEPE (2 mA to 20 mA)
Typical Operating Current	4 mA
Interface Type	BNC

Frequency Response

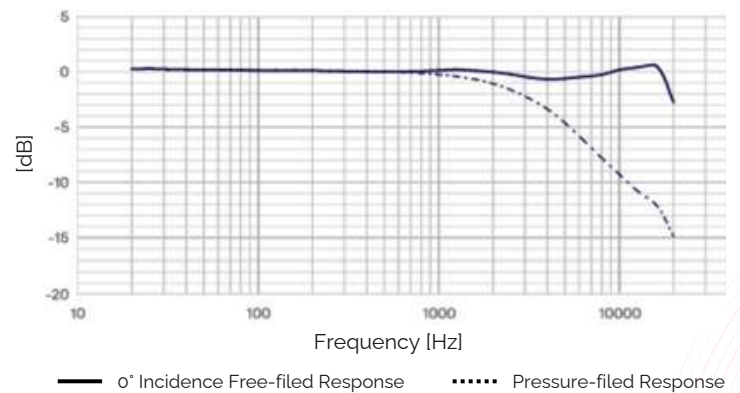


Fig.1 CRY3101-S01 Microphone Set Typical Frequency Response

Dimensions

Height with Grid	94.25 mm (3.711")
Diameter with Grid	23.77 mm (0.936")

Drawings (mm) [inch]

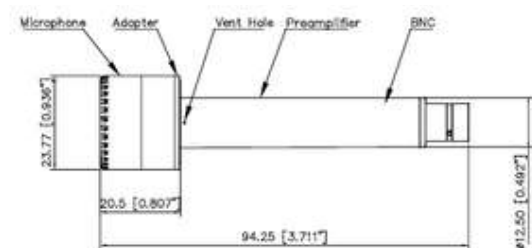


Fig.2 CRY3101-S01 Microphone Set Drawings

Ordering information

Consisting of

Measurement Microphone	CRY3101 1" Free-field Prepolarized Microphone
Preamplifier	CRY3501 1/2" IEPE Preamplifier
Cable	BL5001 BNC to BNC Cable / 1.6m

Consisting of

Microphone Clamp	TA0301 1" Electrostatic Actuator
Power Supply	CRY575 Three-channel Microphone Power Supply
Cable	BL5001 BNC to BNC Cable /1.0m BL5001 BNC to BNC Cable /3.2m BL5001 BNC to BNC Cable /5.0m

Related Products

CRY3102-S01	1" pressure-field prepolarized low-noise microphone set, 50 mV/Pa, 4 Hz-8 kHz, 12 dBA-135dB
CRY3201-S01	1/2" free-field prepolarized high-frequency microphone set, 12.5 mV/Pa, 3.15 Hz-40 kHz, 23 dBA-147dB
CRY3203-S01	1/2" free-field prepolarized high-sensitivity microphone set, 50 mV/Pa, 3.15 Hz-20kHz, 16 dBA-135dB
CRY3403-S01	1/4" free-field prepolarized high-frequency microphone set, 4 mV/Pa, 4 Hz-90kHz, 35dBA-154dB
CRY3261-S01	1/2" free-field prepolarized ultra low-noise microphone set, 354 mV/Pa, 3.15 Hz-20kHz, 7.5dBA-115dB